

Horizontal Plastic Disc Filters



DISC & SCREEN PE, PD

GENERAL CHARACTERISTICS

Body Material: PA6GFR30

Body Material: PA6GFR30


Cartridge Material: PP (Disc) PA (Screen SS 304 Cage PA)



Maximum Working Pressure: 8 Bar (116 PSI)

Maximum Working Temperature: 60°C/ 140 °F

Filtration Degree: 20-50-100-130 Micron

Filter Cartridge: D: Disc Cartridge - E: Screen Cartridge

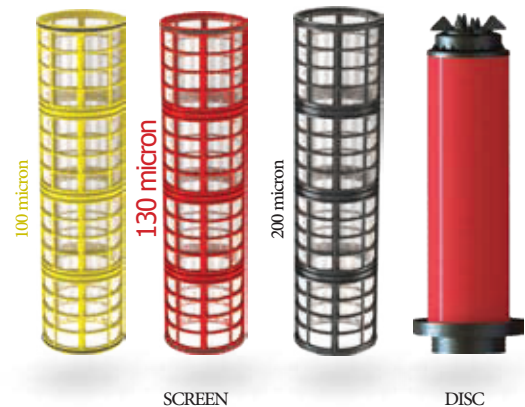

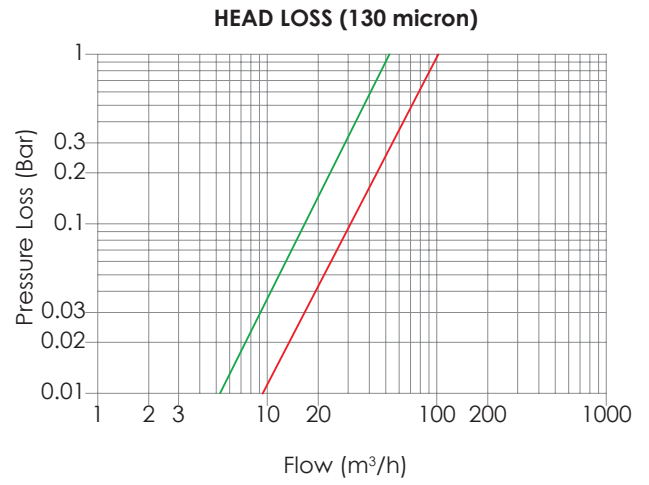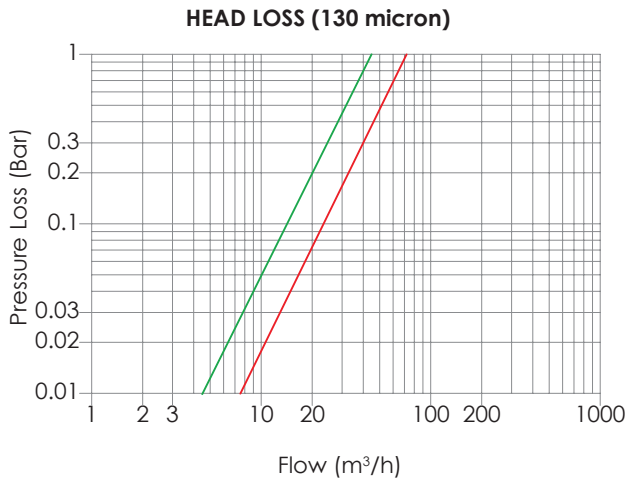

CODE	D	M	T	D1	H	K	Flow Rate		Filtration Area	Weight
	inch			mm			m³/h	Usgpm	cm²	kg
PME2	2	1/4	3/4	190	500	335	20	88	760	5,2
PMD2	2	1/4	3/4	190	500	335	20	88	868	6
PD2	2	1/4	3/4	190	600	335	30	132	1302	7
PSD2	2	1/4	3/4	190	750	335	35	154	1805	8
PD25	2½	1/4	3/4	190	600	335	35	154	1302	7,1
PSD25	2½	1/4	3/4	190	750	335	40	176	1805	8,1
PD3	3	1/4	3/4	190	600	335	45	198	1302	7,2
PSD3	3	1/4	3/4	190	750	335	50	220	1805	8,2
PE2	2	1/4	3/4	190	600	335	30	132	1140	5,4
PSE2	2	1/4	3/4	190	750	335	35	154	1520	6,3
PE25	2½	1/4	3/4	190	600	335	35	154	1140	5,5
PSE25	2½	1/4	3/4	190	750	335	40	176	1520	6,4
PE3	3	1/4	3/4	190	600	335	45	198	1140	5,6
PSE3	3	1/4	3/4	190	750	335	50	220	1520	6,5

