

DRIP IRRIGATION FITTINGSDISTRIBUTORS



DRIP IRRIGATION FITTINGS

DISTRIBUTORS



FEMALE THREADED 2-WAY DISTRIBUTOR WITH RING

Provides a 2-way branch with female thread in thin wall driplines

Product code	Size	Bag quantity	Box quantity	Box weight
016 Q2Y F04 002 Y16	16 mm x ¾"	25	250	5,6 kg



FEMALE THREADED 6-WAY DISTRIBUTOR WITH RING

Provides a 6-way branch with female thread in thin wall driplines

016 Q6Y F10 006 Y16	16 mm x 1"	25	75	3,8 kg



FEMALE THREADED 2-WAY DISTRIBUTOR WITH NUT

Provides a 2-way branch with female thread in thin/medium wall driplines

016 Q2S F04 002 S16	16 mm x ¾"	25	175	5,3 kg
016 Q2S F10 002 S16	16 mm x 1"	25	150	4,9 kg



FEMALE THREADED 4-WAY DISTRIBUTOR WITH NUT

Provides a 4-way branch with female thread in thin/medium wall driplines

016 Q4S F04 004 S16	16 mm x ¾"	25	75	3,7 kg
016 Q4S F10 004 S16	16 mm x 1"	25	75	3,8 kg
020 Q4S F10 004 S20	20 mm x 1"	25	75	4 kg



FEMALE THREADED 6-WAY DISTRIBUTOR WITH NUT

Provides a 6-way branch with female thread in thin/medium wall driplines

010 Q05 F10 000 510 10 MM X 1 25 75 4,9 Kg	016 Q6S F10 006 S16	16 mm x 1"	25	75	4,9 kg
--	---------------------	------------	----	----	--------



FEMALE THREADED 2-WAY BARBED DISTRIBUTOR

Provides a 2-way branch with female thread in thick wall driplines

016 Q2K F10 002 K16	16 mm x 1"	25	225	4,5 kg



FEMALE THREADED 4-WAY BARBED DISTRIBUTOR

Provides a 4-way branch with female thread in thick walled driplines

014 O4K F10 004 K14	16 mm v 1"	25	175	/ı ka

DRIP IRRIGATION FITTINGS

DISTRIBUTORS



MALE THREADED 2-WAY DISTRIBUTOR WITH RING

Provides a 2-way branch with male thread in thin wall driplines

Product code	Size	Bag quantity	Box quantity	Box weight
016 Q2Y M03 002 Y16	16 mm x ½"	25	300	4,8 kg
022 Q2Y M03 002 Y22	22 mm x ½"	25	200	6,2 kg



MALE THREADED 2-WAY DISTRIBUTOR WITH NUT

Provides a 2-way branch with male thread in thin/medium wall driplines

016 Q2S M03 002 S16	16 mm x ½"	25	250	4,9 kg
022 Q2S M03 002 S22	22 mm x ½"	25	150	5,1 kg



2-WAY DISTRIBUTOR WITH RING

Provides a 2-way branch from sealing rubber inserted outlet to thin wall driplines

016 Q2Y C16 002 Y16	16 x 16 mm	25	300	5 kg
022 Q2Y C20 002 Y22	20 x 22 mm	25	200	6,5 kg



2-WAY DISTRIBUTOR WITH NUT

Provides a 2-way branch from sealing rubber inserted outlet to thin/ medium wall driplines


016 Q2S C16 002 S16	16 x 16 mm	25	250	5,1 kg
022 Q2S C20 002 S22	20 x 22 mm	25	150	5,2 kg



FEMALE THREADED 2-WAY (V) DISTRIBUTOR WITH NUT

Provides a 2-way branch with female thread in thin/medium wall driplines

016 Q2S F10 V02 S16	16 mm x 1"	25	150	4.9 ka

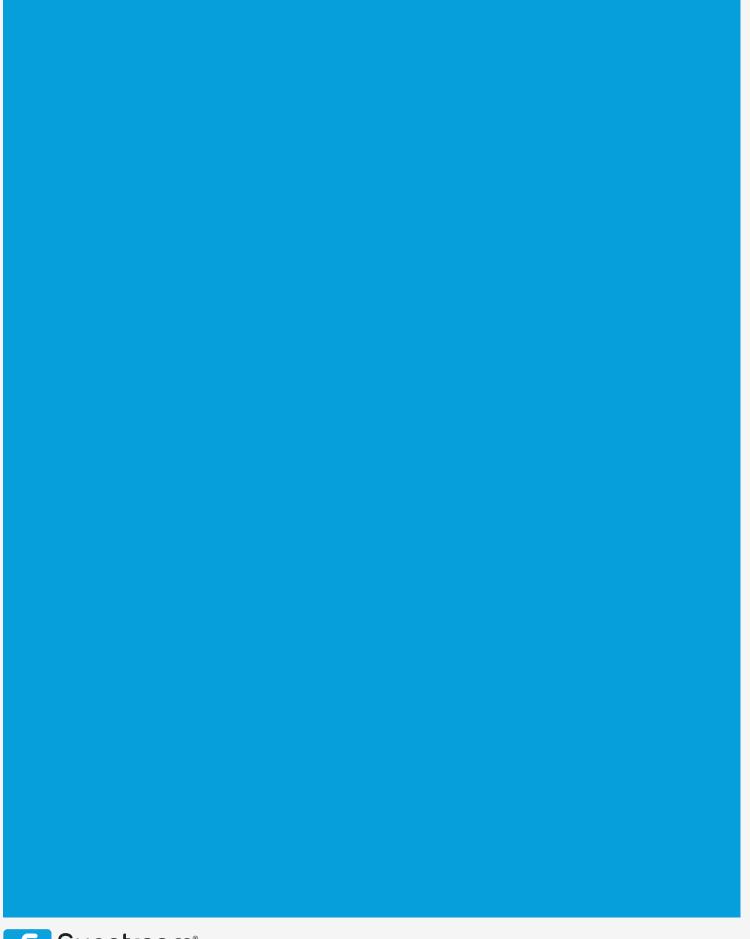



HEADQUARTERS

Orhan Gazi Mah. Isiso San. Sit. 15. Yol Y Blok No: 33 34538 Esenyurt, İstanbul, Turkey +90 212 623 23 08

FACTORY

Organize Sanayi Bölgesi Bursa Karayolu 6. km. 2. Cd. No: 2 Çanakkale, Turkey +90 286 214 32 07